

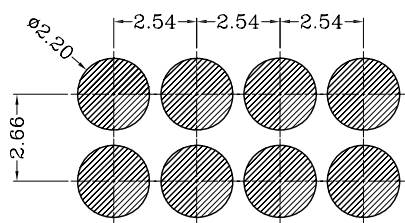
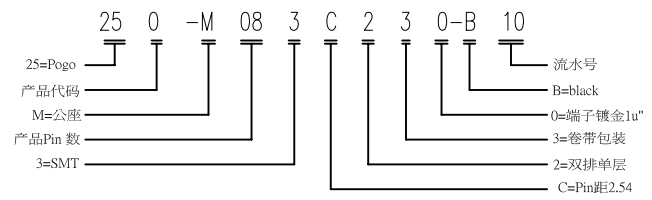



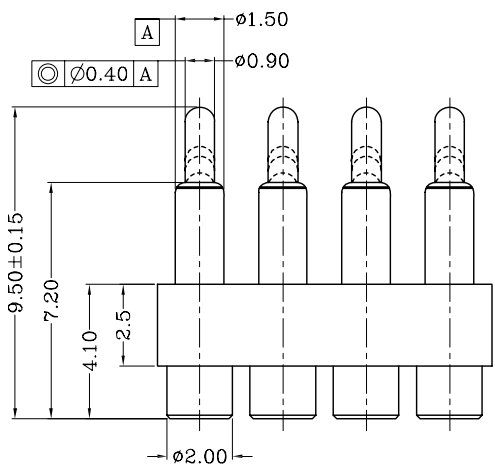



DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
03/20'15	fqh		NEW DWG		AO

Notes:

- 1 Material:
Housing: PA46(30% Glass Filled) color black
- 2 Mechanical demands:
Spring force: 130±35gkf
Plating: Ni 60U"
Plating: Au 1u"
- 3 Packing: Reel Tape
- 4 Contact resistance: ≤ 20mΩ
Insulation resistance: ≥ 1000MΩ
Current rating: 2.0A
Operating voltage: DC 12V

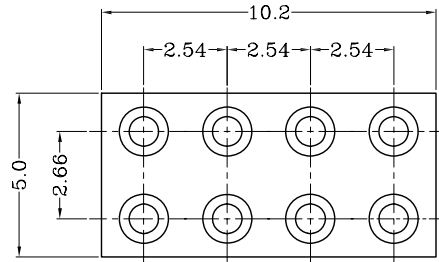

Recommended PCB Layout

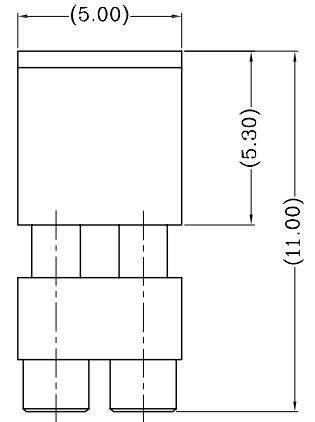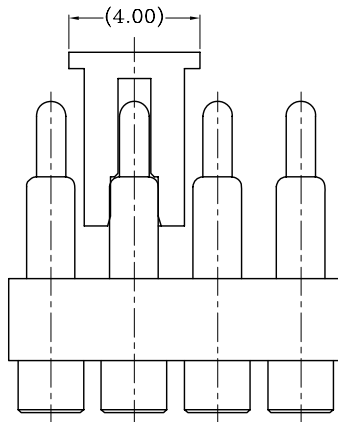

-TOLERANCES-		东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :							
UNLESS OTHERWISE SPECIFIED				TITLE: Positions Pogo Connector 产品品名:					
X.X	±0.15	X.X°	±3.00°	APPD: 核准:	PRODUCT NO: 产品料号: 250-M083C230-B10				
X.XX	±0.10	X.XX°	±1.00°	CHECK:dd 校对:	DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	±0.050	X.XXX°	±0.500°	DRAW: 绘图: FQH	2015.03.20	1:1	mm		1/1