



DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
3/29'16			NEW DWG		AO

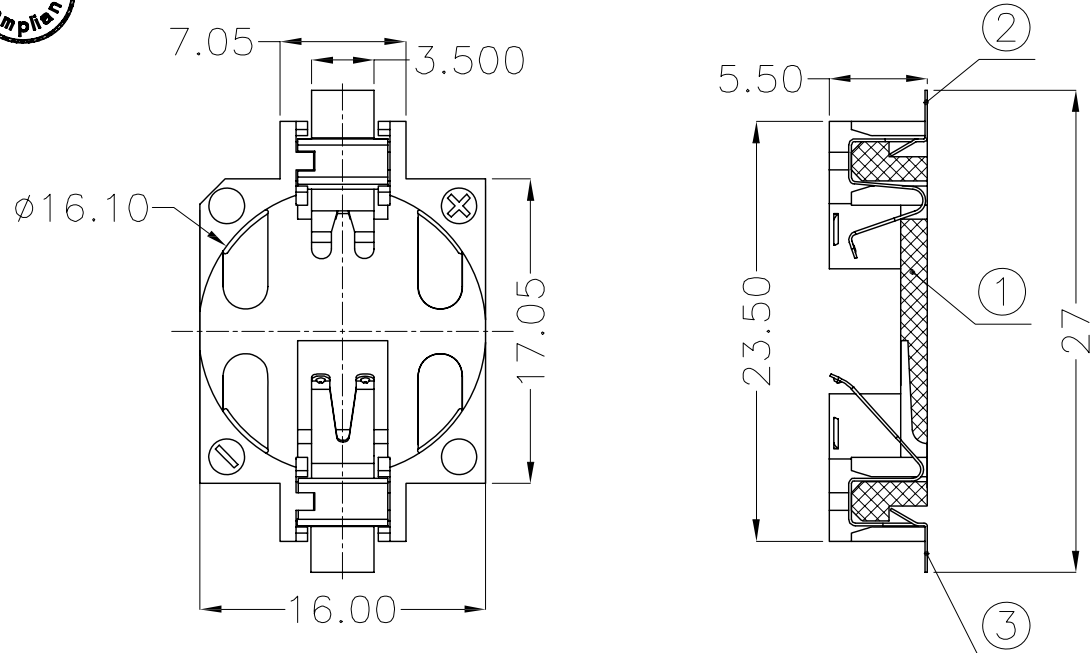


NOTE:

1.MATERIAL:
 a.HOUSING:LCP UL94V-0
 b.CONTACT:PHOSPHOR BRONZE
 (SURFACE PLATING: Sn100U"-120U")
 SEE ORDERING INFORMATION

2.ELECTRIC:
 a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
 b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
 c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
 d.OPERATING TEMPERATURE: -25°C~ +85°C
 e.ADAPTIVE BATTERY MODEL : CR1632

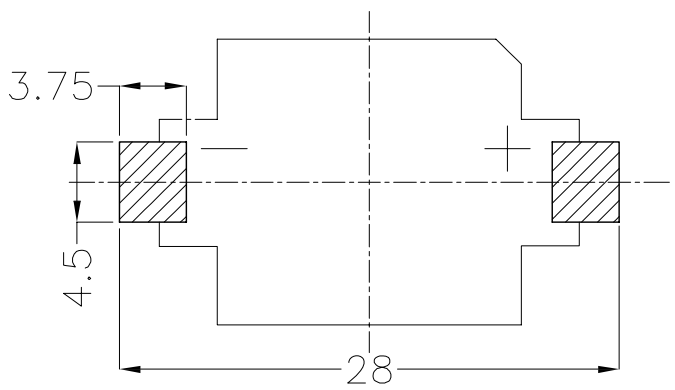

PCB Layout Diagram
Top View

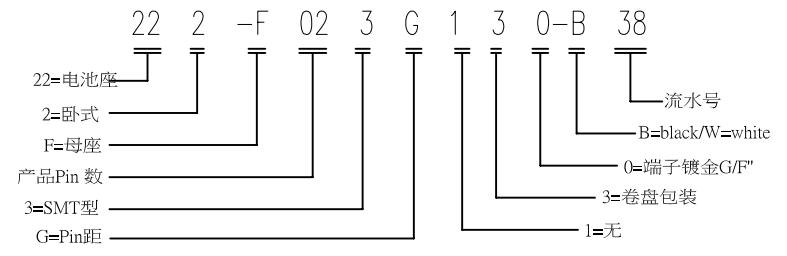

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.15mm	Sn-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.15mm	Sn-Plating
1	HOUSING	1	LCP	WHITE
NO	PART NAMF	O'TY	MATFRIAL	PLATING & COLOR

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表		东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD.	
		TITLE: 电池座 CR1632 卧式 产品品名: 电池座 CR1632 卧式	
X.X ±0.30	X.X° ±3.00°	APPD: 核准:	PRODUCT NO: 产品料号: 222-F023G130-B38
X.XX ±0.15	X.XX° ±1.00°	CHECK:dd 校对:	DATE SCALE UNIT TYPE PAGE
X.XXX ±0.05	X.XXX° ±0.500°	DRAW: 绘图: 罗求新	2016.03.29 1:1 mm CD 1/1