

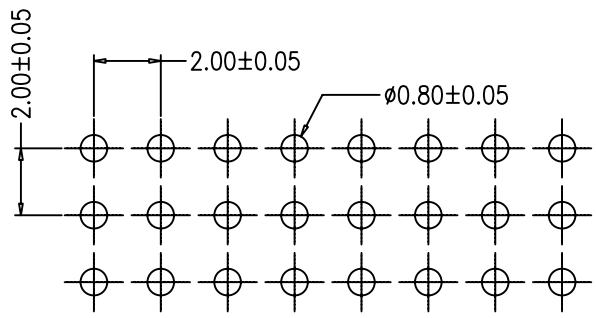
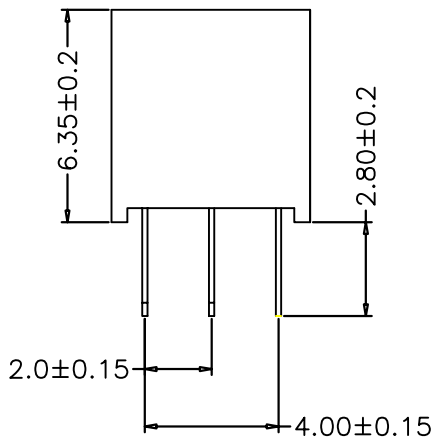


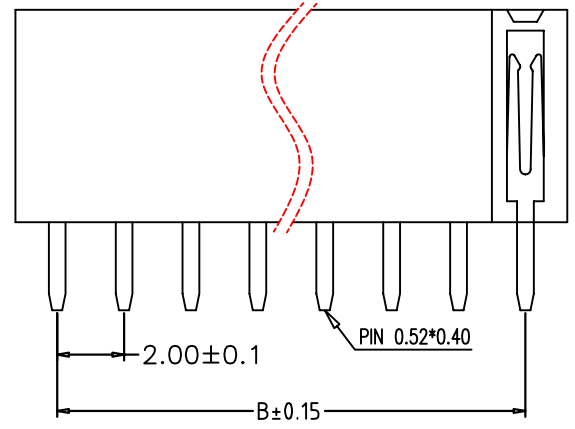

DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
02/13'14	ming		NEW DWG		AO

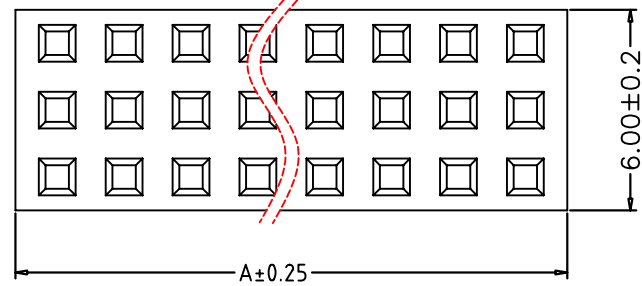

RECOMMEND P.C.B LAYOUT

NOTES:

MATERIAL:

HOUSING:PA6T UL 94V-0.

CONTACT:COPPER ALLOY.

FINISH:

CONTACT:PLATED GOLD(0.8u"~1u"), 50u" MIN

NICKEL UNDER PLATED ALL OVER.

SPECIFICATION

CURRENT RATING : 1.5 AMP MAX.

DIELECTRIC WITHSTAND VOLTAGE :

600V AC R.M.S. FOR 1 MINTUE.

INSULATION RESISTANCE : 1,000MΩ MIN.AT 500V DC.

OPERATING TEMPERATURE : -40°C TO +105°C.

INSERTION FORCE

RETENTION FORCE BEFORE SOLDERING >=0.8KGF

RETENTION FORCE AFTER SOLDERING >=0.2KGF

PART NO.

131-F XX 18510-B11

产品Pin数

pin number	dim A	dim B	pin number	dim A	dim B
3*2 pin	4.5	2.0	3*13 pin	26.5	24.0
3*3 pin	6.5	4.0	3*14 pin	28.5	26.0
3*4 pin	8.5	6.0	3*15 pin	30.5	28.0
3*5 pin	10.5	8.0	3*16 pin	32.5	30.0
3*6 pin	12.5	10.0	3*17 pin	34.5	32.0
3*7 pin	14.5	12.0	3*18 pin	36.5	34.0
3*8 pin	16.5	14.0	3*22 pin	44.5	42.0
3*9 pin	18.5	16.0	3*23 pin	46.5	44.0
3*10 pin	20.5	18.0	3*25 pin	50.5	48.0
3*11 pin	22.5	20.0	3*40 pin	80.5	78.0
3*12 pin	24.5	22.0			

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表				东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :					
				TITLE: 产品品名 : 2.00mm 三排排母DIP 180°					
X.X	±0.25	X.X"	±3.00"	APPD: 核准:	PRODUCT NO: 产品料号 : 131-FXX18510-B11				
X.XX	±0.20	X.XX"	±1.00"	CHECK:dd 校对: 付清华	DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	±0.010	X.XXX"	±0.500"	DRAW: 绘图: 范小飞	2014.02.13	1:1	mm	CD	1/1