







DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
12/23'13	VICKY		NEW DWG		AO

SPECIFICATIONS

Current Rating:1.5 Amp  
 Insulation Resistance:1000MΩ Min  
 Contact Resistance:20mΩ  
 Withstanding voltage: AC 500V min  
 Operating Temperature -40℃ to +105℃  
 Materials

Contact Material:copper Alloy and GOLD FLASH  
 Insulation Material:polyester. UL94-0 PA6T  
 Retention force before soldering ≥0.8kgf  
 Retention force after soldering ≥0.2kgf  
 Color:BLACK

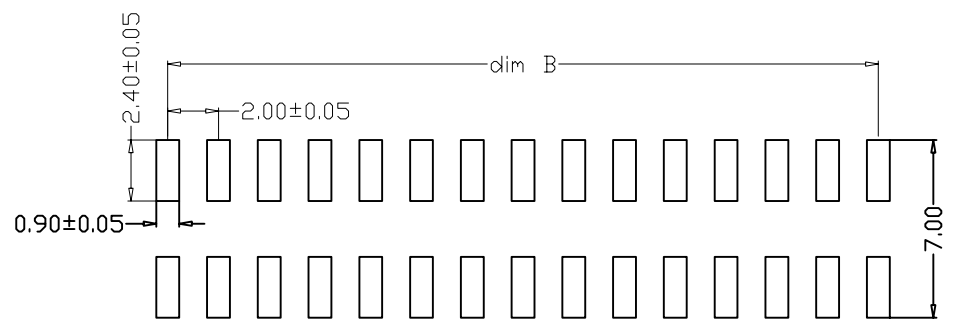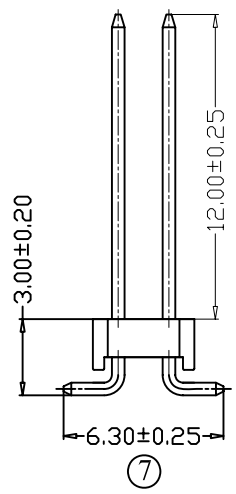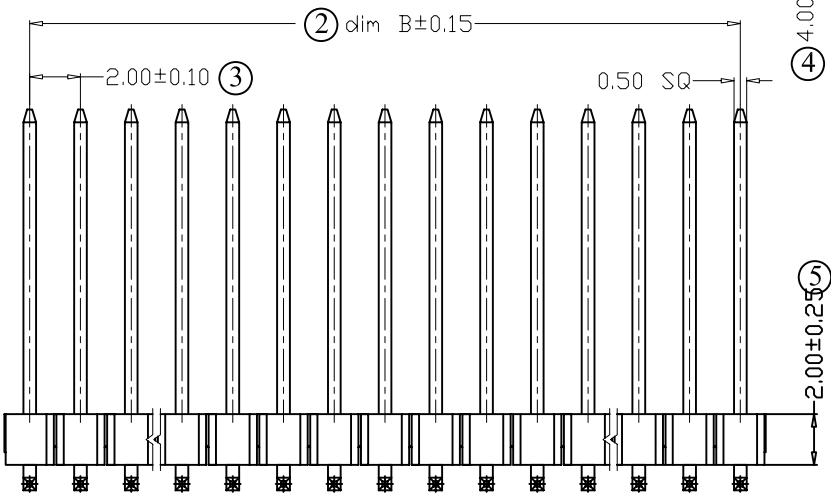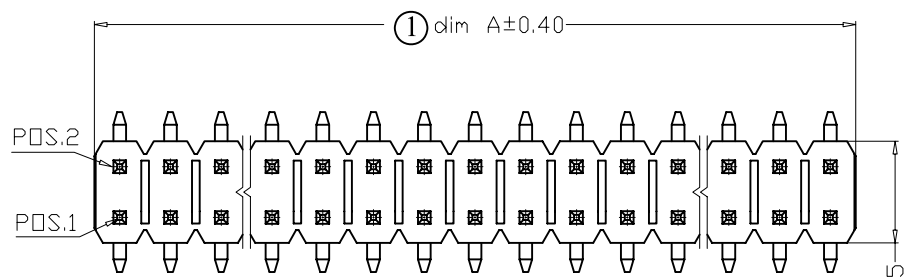

RECOMMEND P.C.B LAYOUT

pin number	dim A	dim B	pin number	dim A	dim B
2*2 pin	4.0	2.0	2*14 pin	28.0	26.0
2*3 pin	6.0	4.0	2*15 pin	30.0	28.0
2*4 pin	8.0	6.0	2*16 pin	32.0	30.0
2*5 pin	10.0	8.0	2*17 pin	34.0	32.0
2*6 pin	12.0	10.0	2*18 pin	36.0	34.0
2*7 pin	14.0	12.0	2*19 pin	38.0	36.0
2*8 pin	16.0	14.0	2*20 pin	40.0	38.0
2*9 pin	18.0	16.0	2*21 pin	42.0	40.0
2*10 pin	20.0	18.0	2*22 pin	44.0	42.0
2*11 pin	22.0	20.0	2*23 pin	46.0	44.0
2*12 pin	24.0	22.0	2*25 pin	50.0	48.0
2*13 pin	26.0	24.0	2*40 pin	80.0	78.0

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表		东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD.	
		TITLE: 2.00MM 双排排针 产品品名: SMT 立式 H=12.0	
X.X ±0.25	X.X° ±3.00°	APPD: 核准:	PRODUCT NO: 产品料号: 130-MXX38260-B03
X.XX ±0.20	X.XX° ±1.00°	CHECK:dd 校对:	DATE SCALE UNIT TYPE PAGE
X.XXX ±0.010	X.XXX° ±0.500°	DRAW: 绘图:	2013.12.20 1:1 mm CD 1/1