

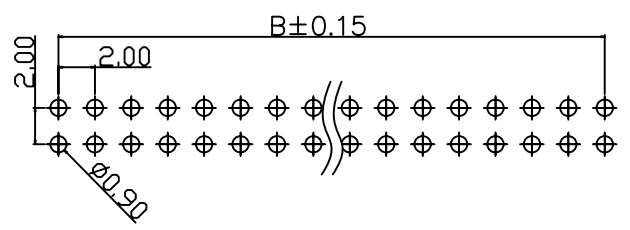
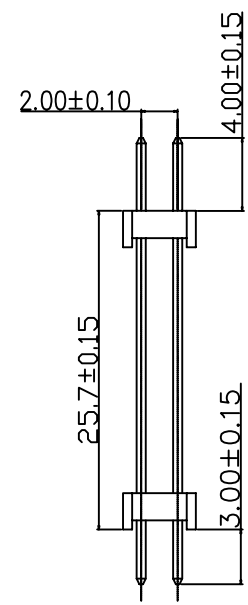


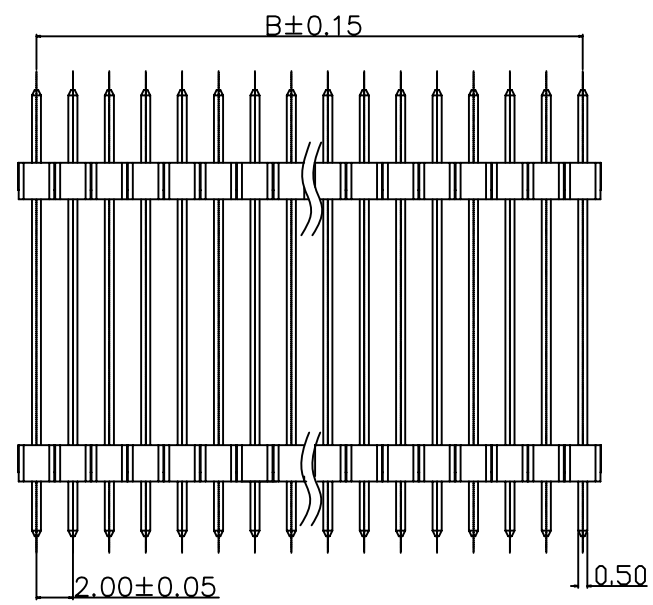

DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
3/15'14	ming		NEW DWG		AO

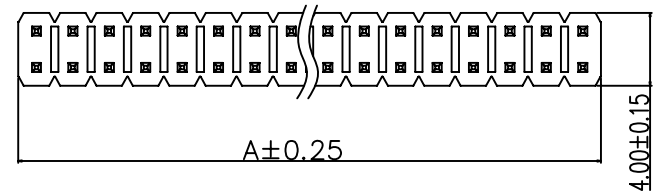

RECOMMEND P.C.B LAYOUT

PART NO.
130-M XX 18460-B32

产品Pin数

SPECIFICATIONS

Current Rating:1.5 Amp
 Insulation Resistance:1000MΩ
 Contact Resistance:20mΩ
 Operating Temperature -40°C to +105°C
 Materials
 contact Material:copper Alloy AND Gold Flash
 Insulation Material:polyester.UL94-0 PA6T
 Retention force before soldering ≥0.8kgf
 withstanding temperature 260° ±5°
 Retention force after soldering ≥0.2kgf
 Color:BLACK

pin number	dim A	dim B	pin number	dim A	dim B
2*2 pin	4.0	2.0	2*12 pin	24.0	22.0
2*3 pin	6.0	4.0	2*13 pin	26.0	24.0
2*4 pin	8.0	6.0	2*14 pin	28.0	26.0
2*5 pin	10.0	8.0	2*15 pin	30.0	28.0
2*6 pin	12.0	10.0	2*16 pin	32.0	30.0
2*7 pin	14.0	12.0	2*17 pin	34.0	32.0
2*8 pin	16.0	14.0	2*18 pin	36.0	34.0
2*9 pin	18.0	16.0	2*19 pin	38.0	36.0
2*10 pin	20.0	18.0	2*20 pin	40.0	38.0
2*11 pin	22.0	20.0	2*40 pin	80.0	78.0

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表		东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD.				
X.X	±0.25	X.X°	±3.00°	TITLE: 2.00MM 双排排针 DIP 180° 产品品名: 总针长32.7mm		
X.XX	±0.20	X.XX°	±1.00°	APPD: 核准: CHECK:dd 校对: DATE SCALE UNIT TYPE PAGE 2014.03.15 1:1 mm CD 1/1		
X.XXX	±0.010	X.XXX°	±0.500°	DRAW: 绘图: PRODUCT NO: 产品料号: 130-MXX18460-B32		