

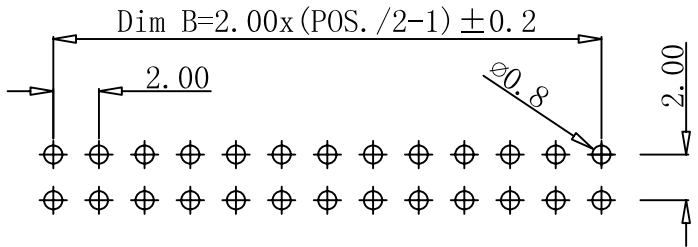
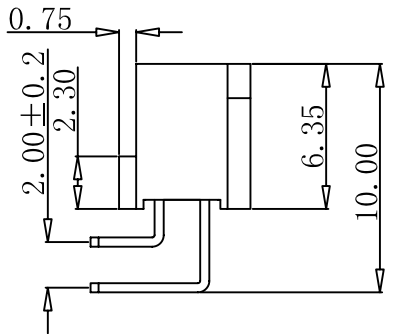


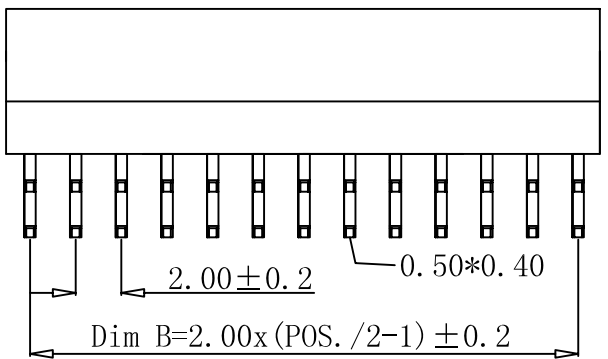

DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
12/23'13	VICKY		NEW DWG		AO

**SPECIFICATIONS**

Current Rating:1.5 Amp  
 Insulation Resistance:1000MΩ Min  
 Contact Resistance:20mΩ  
 Withstanding voltage: AC 500V min  
 Operating Temperature -40℃ to +105℃  
 Materials  
 Contact Material:copper Alloy and GOLD FLASH  
 Insulation Material:polyester,UL94-0 PA6T  
 Retention force before soldering ≥0.8kgf  
 Retention force after soldering ≥0.2kgf  
 Color:BLACK

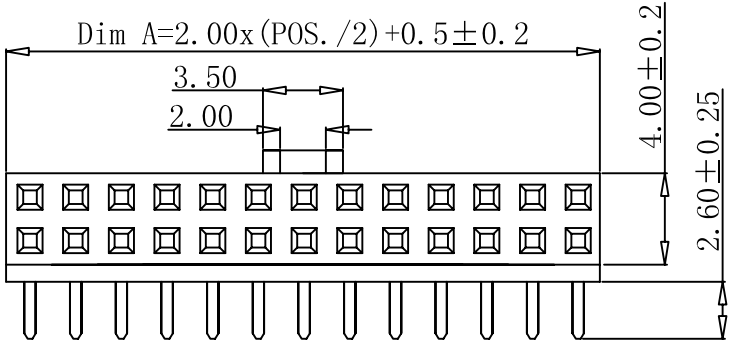

RECOMMEND P. C. B LAYOUT

PIN NO.	料号	Dim A(mm)	Dim B(mm)	PIN NO.	料号	Dim A(mm)	Dim B(mm)
2*2	130-F0428210-B91	4.5	2.0	2*12	130-F2428210-B91	24.5	22.0
2*3	130-F0628210-B91	6.5	4.0	2*13	130-F2628210-B91	26.5	24.0
2*4	130-F0828210-B91	8.5	6.0	2*14	130-F2828210-B91	28.5	26.0
2*5	130-F1028210-B91	10.5	8.0	2*15	130-F3028210-B91	30.5	28.0
2*6	130-F1228210-B91	12.5	10.0	2*16	130-F3228210-B91	32.5	30.0
2*7	130-F1428210-B91	14.5	12.0	2*17	130-F3428210-B91	34.5	32.0
2*8	130-F1628210-B91	16.5	14.0	2*18	130-F3628210-B91	36.5	34.0
2*9	130-F1828210-B91	18.5	16.0	2*19	130-F3828210-B91	38.5	36.0
2*10	130-F2028210-B91	20.5	18.0	2*20	130-F4028210-B91	40.5	38.0
2*11	130-F2228210-B91	22.5	20.0				

-TOLERANCES-  
UNLESS OTHERWISE SPECIFIED  
公差参考表

X.X	±0.25	X.X°	±3.00°		APPD: 核准: CHECK:dd 校对: DRAW: 绘图:	TITLE: <b>2.00MM 双排排母防呆垫高</b> 产品品名: 型 DIP90° H=6.35 PRODUCT NO: 产品料号: <b>SEE NOTE</b>				
X.XX	±0.20	X.XX°	±1.00°			DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	±0.010	X.XXX°	±0.500°			2013.12.20	1:1	mm	CD	1/1

**东莞市龙科电子科技有限公司**  
 DONGGUAN LONGKE ELECTRONICS CO.,LTD :