






DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
12/23'13	VICKY		NEW DWG		A0
08/01'17	LQX		根据实物变更图面一致		A1

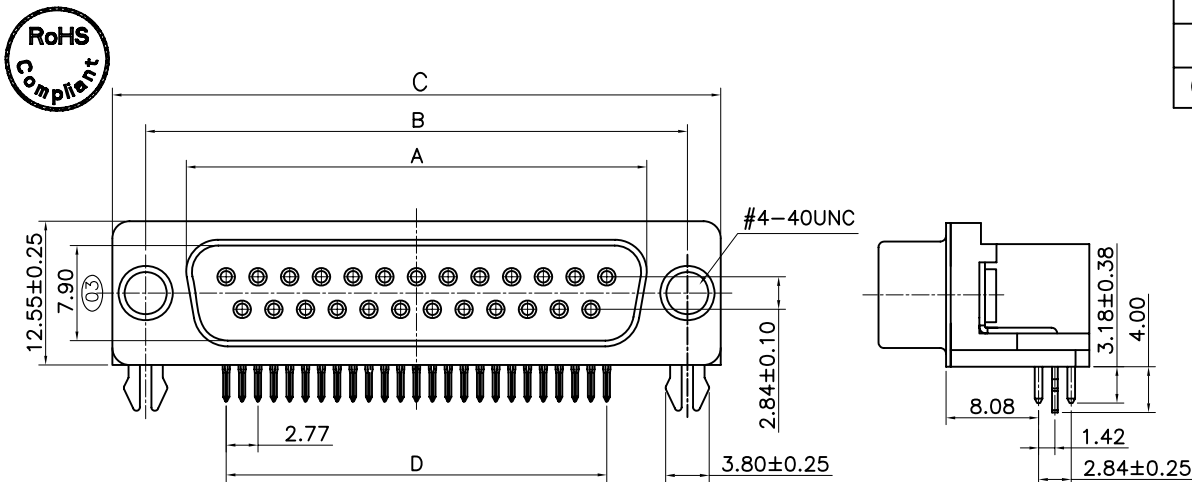


1. MATERIALS:
- 1.1 HOUSING: PBT+30%G.F UL 94V-0,COLOR:BLACK
  - 1.2 CONTACTS: BRASS
  - 1.3 SHIELD: SPCC
  - 1.4 SCREW: 12L14
  - 1.5 BOARD LOCK: SPCC
2. FINISH:
- 2.1 CONTACTS: GOLD FLASH PLATED ON CONTACT AREA  
120u" MIN.TIN PLATING ON SOLDER TAILS  
50u" MIN.NICKEL VNDERPLATED OVERALL
  - 2.2 SHIELD: 50u" MIN.NICKEL PLATED
  - 2.3 SCREW: 50u" MIN.NICKEL PLATED
  - 2.4 BOARD LOCK:120u" MIN.TIN PLATING ON SOLDER TAILS  
50u" MIN.NICKEL VNDERPLATED OVERALL
3. SPECIFICATION:
- 3.1 CURRENT RATING:3 AMP MAX
  - 3.2 DIELECTRIC WITH STANDING VOLTAGE;  
500V AC R.M.S FOR ONE MINUTE
  - 3.3 INSULATION RESISTANCE:1000M OHMS  
MINLAT 500V DC.
  - 3.4 CONTACT RESISTANCE:30m OHMS MAX.
  - 3.5 OPERATING TEMPERATURE:-55°TO +105°.

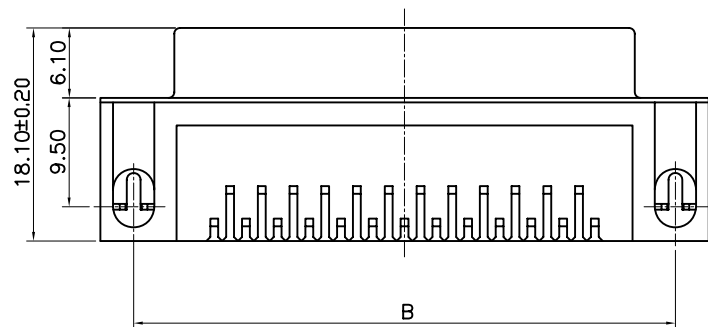

NO.OF CONTACT	A ±0.38	B ±0.38	C ±0.38	D ±0.10
09	16.30	24.99	30.81	11.08
15	24.60	33.32	39.25	19.39
25	38.38	47.04	53.10	33.24
37	54.80	63.50	69.35	49.86

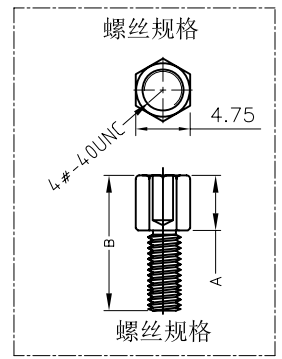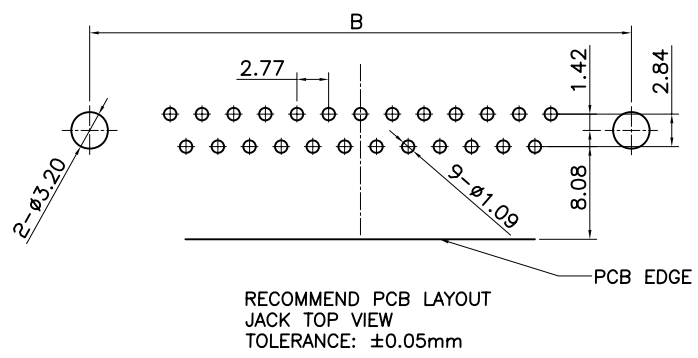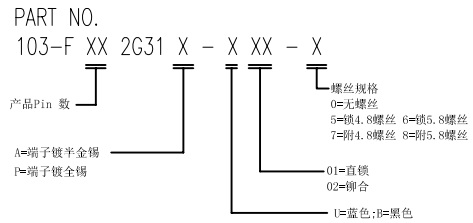

A	B
4.80	11.80
5.80	12.80

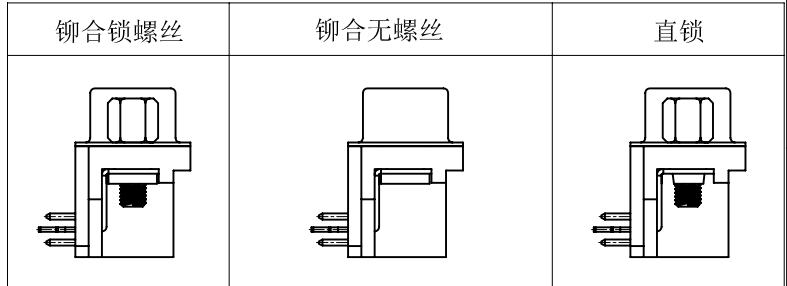

-TOLERANCES-  
UNLESS OTHERWISE SPECIFIED  
公差参考表

X.X ±0.25	X.X° ±3.00°	APPD: 核准:	东 莞 市 龙 科 电 子 科 技 有 限 公 司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :					
X.XX ±0.20	X.XX° ±1.00°	CHECK:dd 校对:	TITLE: 产品品名: DR 母座系列					
X.XXX ±0.010	X.XXX° ±0.500°	DRAW: 绘图:	PRODUCT NO: 产品料号: SEE NOTE	DATE	SCALE	UNIT	TYPE	PAGE
			2013.12.20	1:1	mm	CD	1/1	

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作