
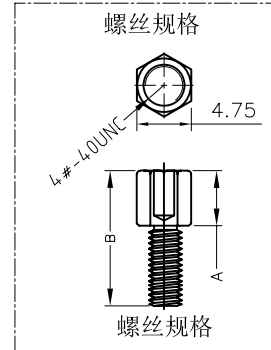
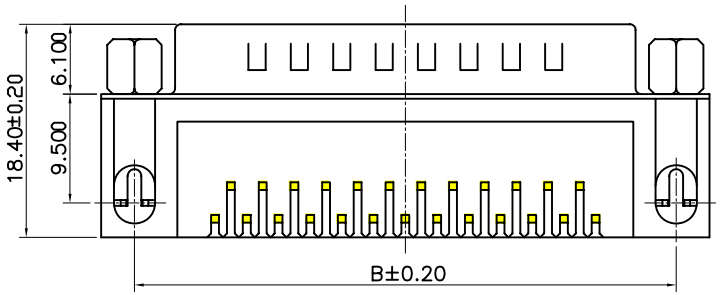



DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
12/23'13	yang		NEW DWG		AO

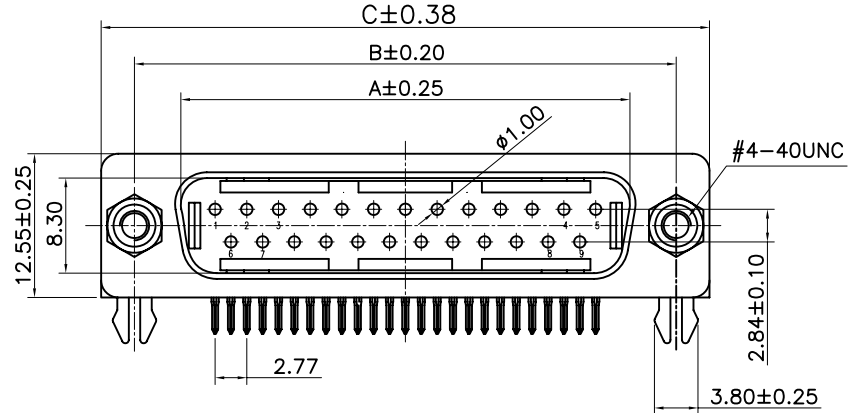

A	B
4.80	11.80
5.80	12.80

- MATERIALS:
 - HOUSING: PBT+30%G.F UL 94V-0,COLOR:BLACK
 - CONTACTS: BRASS
 - SHIELD: SPCC
 - SCREW: 12L14
 - BOARD LOCK: SPCC
- FINISH:
 - CONTACTS: GOLD FLASH (1u")PLATED ON CONTACT AREA
120u" MIN.TIN PLATING ON SOLDER TAILS
50u" MIN.NICKEL VNDERPLATED OVERALL
 - SHIELD: 50u" MIN.NICKEL PLATED
 - SCREW: 50u" MIN.NICKEL PLATED
 - BOARD LOCK:120u" MIN.TIN PLATING ON SOLDER TAILS
50u" MIN.NICKEL VNDERPLATED OVERALL
- SPECIFICATION:
 - CURRENT RATING:3 AMP MAX
 - DIELECTRIC WITH STANDING VOLTAGE;
500V AC R.M.S FOR ONE MINUTE
 - INSULATION RESISTANCE:1000M OHMS
MINLAT 500V DC.
 - CONTACT RESISTANCE:30m OHMS MAX.
 - OPERATING TEMPERATURE:-55°TO +105°.



PART NO.
103-M XX 2G31 X - X XX - X

产品Pin 数: 1, 2, 3, 4, 5, 6, 7, 8

螺丝规格:
0=无螺丝
5=锁4.8螺丝 6=锁5.8螺丝
7=附4.8螺丝 8=附5.8螺丝

A=端子镀半金锡
P=端子镀全锡

01=直锁
02=铆合
1=蓝色; 0=黑色

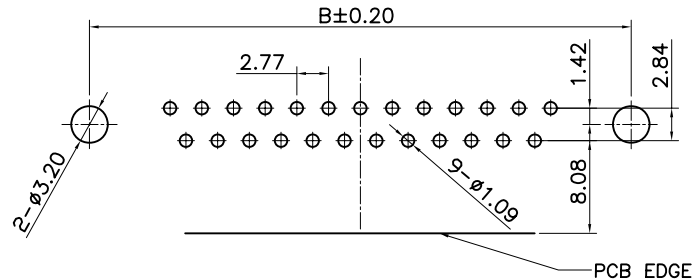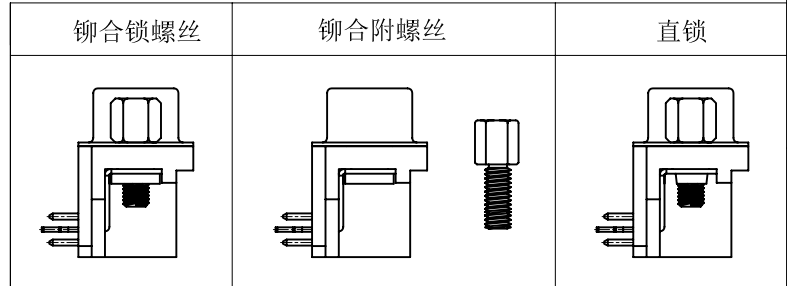

NO.OF CONTACT	A ±0.38	B ±0.38	C ±0.38
09	16.90	24.99	30.81
15	25.30	33.32	39.25
25	39.06	47.04	53.10
37	55.50	63.50	69.35

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差参考表

X.X	±0.25	X.X°	±3.00°
X.XX	±0.20	X.XX°	±1.00°
X.XXX	±0.010	X.XXX°	±0.500°

东莞市龙科电子科技有限公司
DONGGUAN LONGKE ELECTRONICS CO.,LTD:

TITLE: DR公座 8.08 Dip 90°
产品品名: DR公座 8.08 Dip 90°
PRODUCT NO: SEE NOTE
产品料号: SEE NOTE

APPD: 核准:	CHECK: 校对:	DATE	SCALE	UNIT	TYPE	PAGE
		2013.12.20	1:1	mm	CD	1/1