





DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
3/29'14	ming		NEW DWG		AO

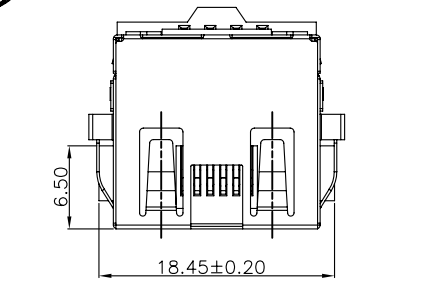

NOTES:

- HOUSING MATERIAL:LCP+30%G/F, UL94V-0.
- CONTACT MATERIAL:COPPER ALLOY,T=0.30.
- PLATING: GOLD PLATED ON CONTACT AREA, 100u"MIN.MATTE TIN PLATED ON SOLDERING AREA, 50u"MIN. NICKEL PLATED OVERALL.
- SHELL:COPPER ALLOY,T=0.20. 50u"MIN. NICKEL PLATED OVERALL.
- ⊗为QIP尺寸.

ELECTRICAL:

- VOLTAGE RATING: 125V AC RMS.
- CURRENT RAIING: 1.5AMP.
- CONTACT RESISTANCE: 30MILLIOHMS MAX.
- INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.
- DIELECTRIC WHTHSTANDING RESISTANCE: 1000V AC RMS 50Hz.1MIN.





MECHANICAL:

- DURRABILITY: 750 CYCLES MIN.
- PCB RETENTION PER-SOLDER: 1LBMIN.

ENVIRONMENTAL:

- STORAGE: -40°C~85°C
- OPERATION: 0°C~70°

\*Apply to the EU standards(ROSH)

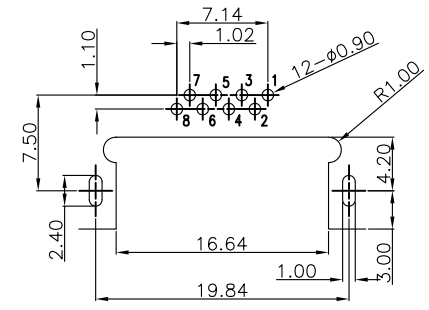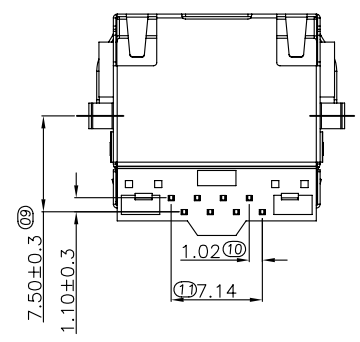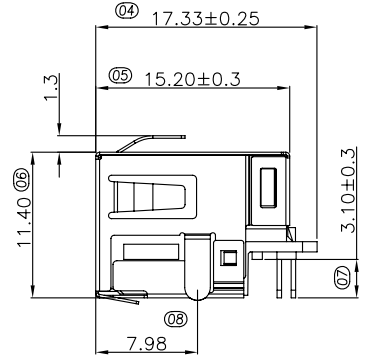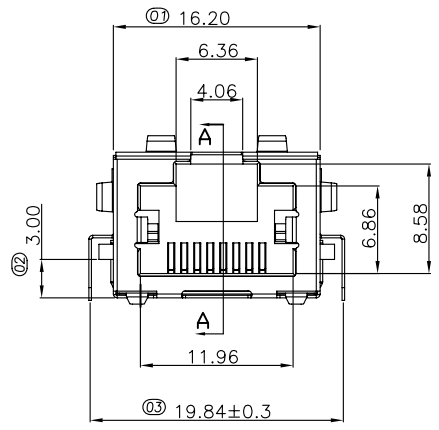

PCBLAYOUT  
TOL:±0.05

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表		东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :				
				TITLE: 产品品名: RJ45 沉板3.0 无灯有弹片		
X.X ±0.25	X.X° ±3.00°	APPD: 核准:		PRODUCT NO: 产品料号: 241-F0824410-B08		
X.XX ±0.20	X.XX° ±1.00°	CHECK:dd 校对:		DATE	SCALE	UNIT
X.XXX ±0.10	X.XXX° ±0.500°	DRAW: 绘图:		2014.03.29	1:1	mm
				TYPE	CD	PAGE
				1/1		