

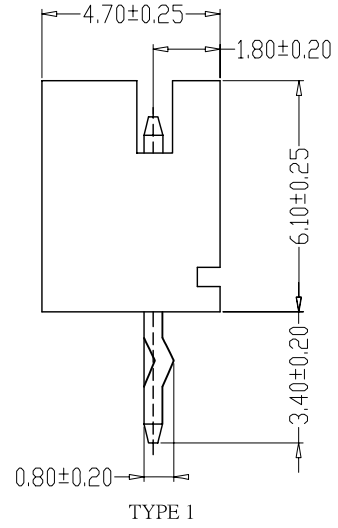
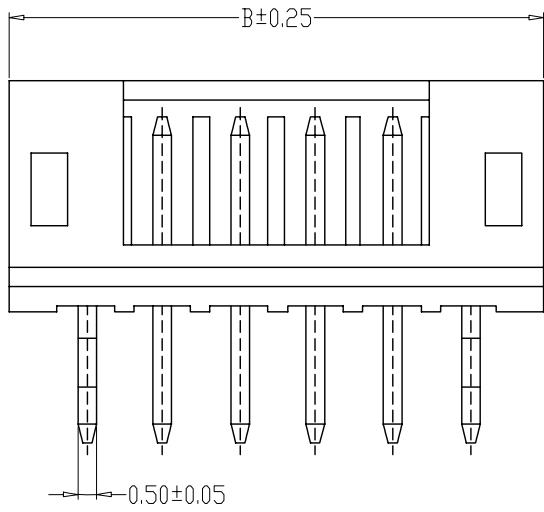
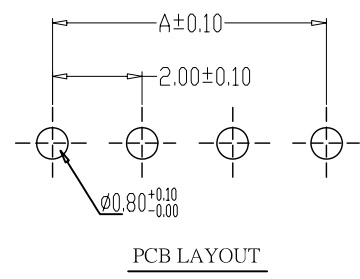


DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
3/29'16			NEW DWG		AO

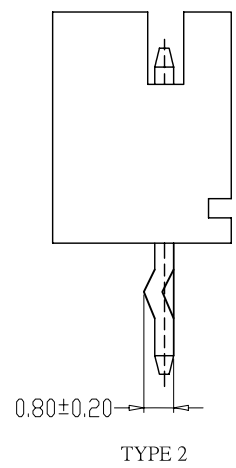


SPECIFICATIONS

1. Current Rating: 2A AC, DC
2. Voltage Rating: 250V AC, DC
3. Temperature Range: -25° C ~ +85° C
4. Contact Resistance: 20mΩ Max
5. Insulation Resistance: 1000MΩ Min
6. Withstanding Voltage: 800V AC/minute
7. Material: Wafer Nylon66, UL94V-0  
PIN Brass Tin-plated

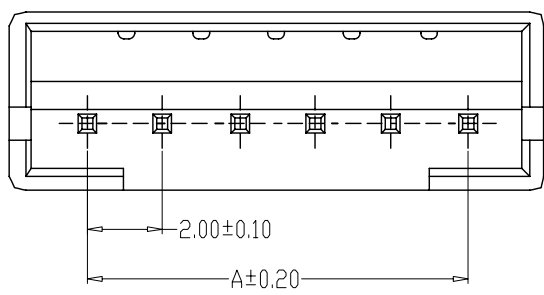

PIN NO.	尺寸	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
16	30.00	34.00

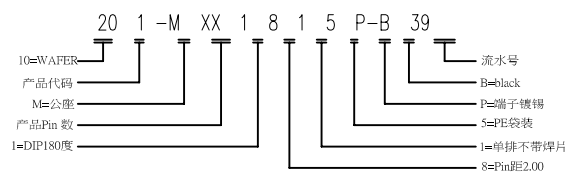

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表		东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD.	
		TITLE: 产品品名: WAFER DIP 180° 直针	
X.X ±0.25	X.X° ±3.00°	APPD: 核准:	PRODUCT NO: 产品料号: 201-MXX1815P-B39
X.XX ±0.20	X.XX° ±1.00°	CHECK:dd 校对:	DATE SCALE UNIT TYPE PAGE
X.XXX ±0.10	X.XXX° ±0.500°	DRAW: 绘图: 罗求新	2016.03.29 1:1 mm CD 1/1