

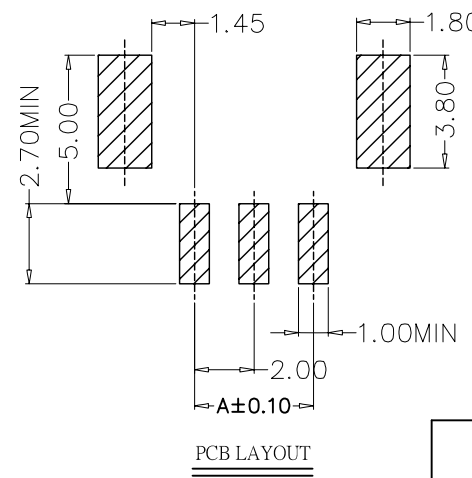
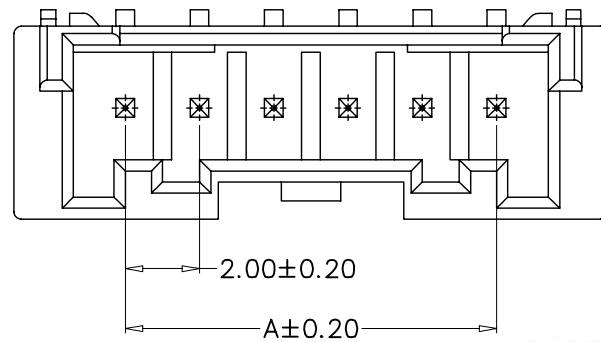


DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
3/29'14			NEW DWG		AO

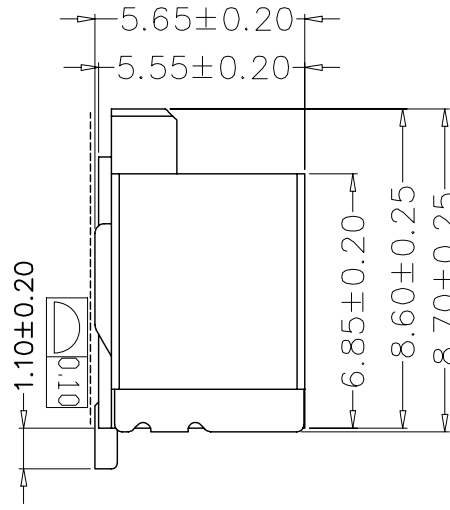


SPECIFICATIONS

- 1.Current Rating:3A AC,DC
- 2.Voltage Rating:300V AC,DC
- 3.Temperatuer Range:-25°C~+85°C
- 4.Contact Resistance:20mΩ max
- 5.Insulation Resistance:100 MΩ min
- 6.Withstanding Voltang:800V AC/minute
- 7.Material:Wafer Nylou66, UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

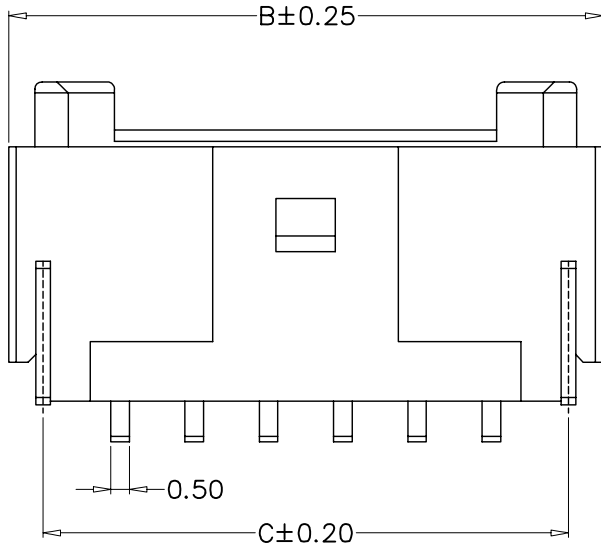

料号	尺寸 (mm)	
	A	B
201-M023813P-W70	2.00	8.00
201-M033813P-W70	4.00	10.00
201-M043813P-W70	6.00	12.00
201-M053813P-W70	8.00	14.00
201-M063813P-W70	10.00	16.00
201-M073813P-W70	12.00	18.00
201-M083813P-W70	14.00	20.00
201-M093813P-W70	16.00	22.00
201-M103813P-W70	18.00	24.00
201-M113813P-W70	20.00	26.00
201-M123813P-W70	22.00	28.00
201-M203813P-W70	38.00	44.00

PART NO.
201-M XX 381 3 P- W 70

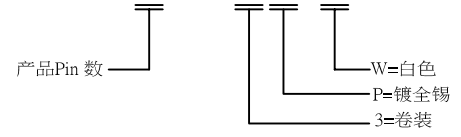

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表		东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :	
X.X ±0.25	X.X° ±3.00°		TITLE: 产品品名: Wafer 2.00PH 卧贴
X.XX ±0.20	X.XX° ±1.00°		PRODUCT NO: 产品料号: SEE NOTE
X.XXX ±0.10	X.XXX° ±0.500°	DRAW: 绘图: 范小飞	DATE SCALE UNIT TYPE PAGE
			2015.03.25 1:1 mm CD 1/1