



DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
11/18'14			NEW DWG		AO



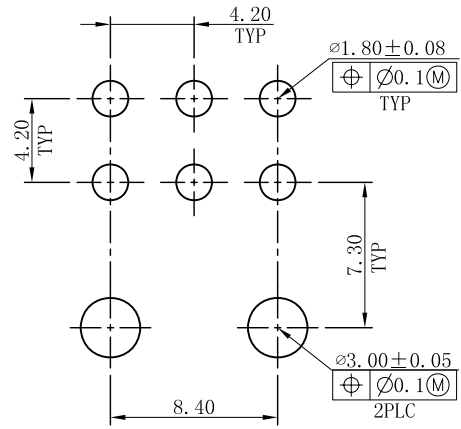


备注：检验尺寸：(01)~(11)

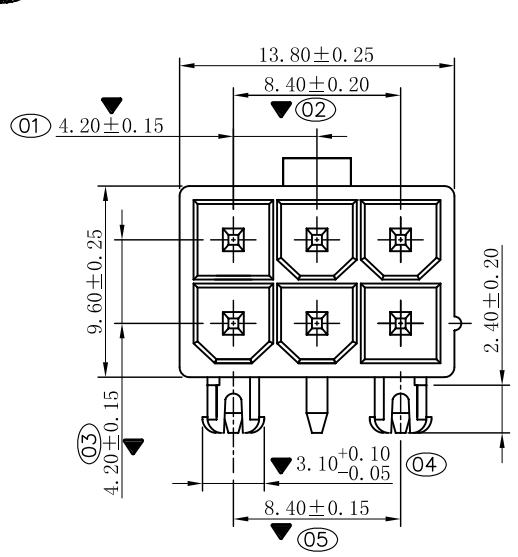

RECOMMENDED P. C. B. HOLE LAYOUT  
(TOLERANCE: ± 0.05)

NOTES:  
 1.MATERIAL:  
 HOUSING: LCP, UL 94V-0, COLOR: BLACK  
 CONTACT: BRASS, SQ.1.08mm.  
 2.FINISH:  
 CONTACT: 120u" MIN TIN PLATED OVER,  
 50u" MIN. NICKEL UNDER PLATING ALL OVER.  
 3.SPECIFICATION:  
 CONTACT RESISTANCE: 20mΩ MAX.  
 INSULATION RESISTANCE: 1000MΩ.  
 VOLTAGE RATING: 250VAC.  
 CURRENT RATING: 9AMPS.  
 TEMPERATURE RANGE: -55°C TO +105°C.

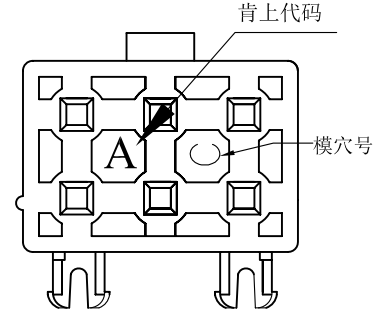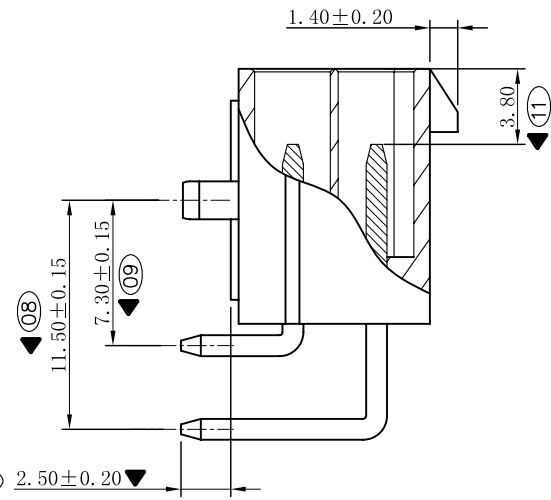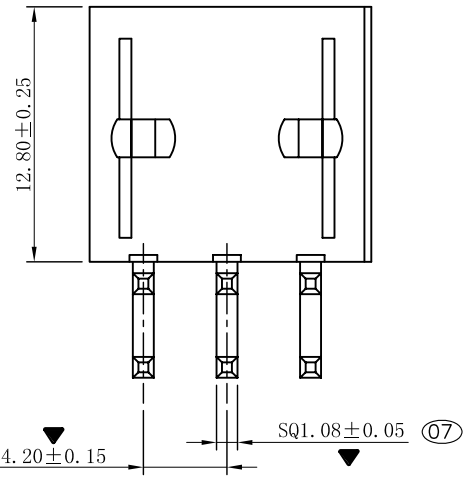

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD.								
公差参考表				TITLE: ATX(P=4.2) R/A 2X3P 产品品名: 无LOGO后面有“A”无卤						
X.X	±0.25	X.X°	±3.00°	APPD: 核准:		PRODUCT NO: 产品料号: 150-M062E31Q-B42				
X.XX	±0.20	X.XX°	±1.00°	CHECK:dd 校对:		DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	±0.010	X.XXX°	±0.500°	DRAW: 绘图: 范小飞		2014.11.18	1:1	mm	CD	1/1