

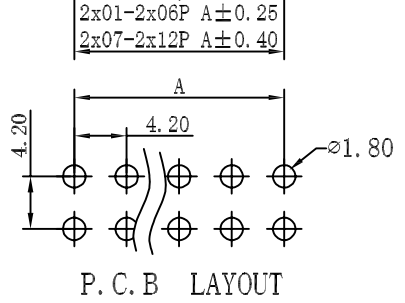
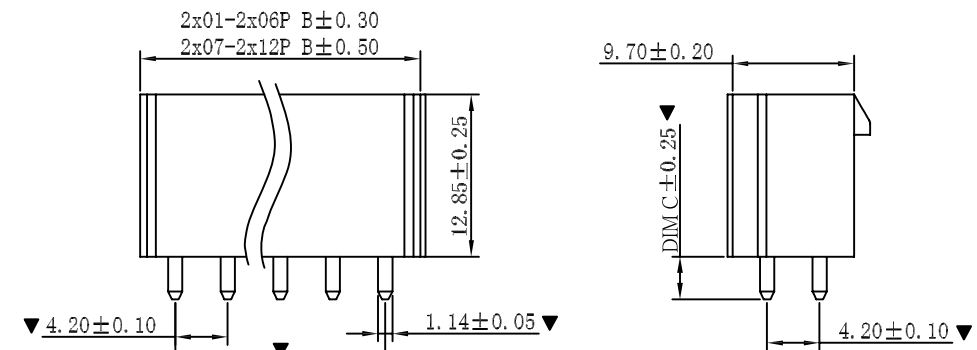


DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
08/17'16	何俊勇		NEW DWG		AO

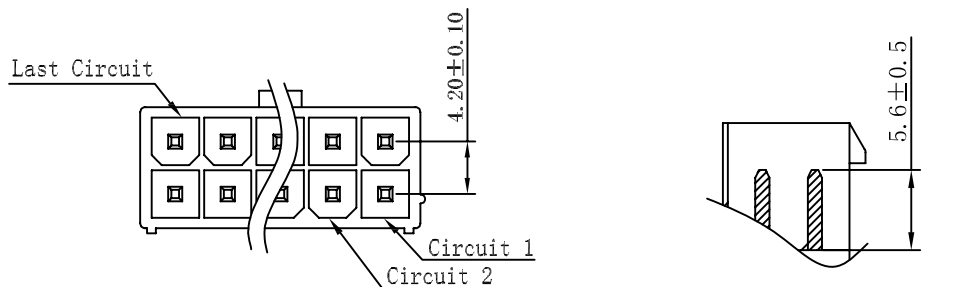


■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Poles : 02-24P
- Housing Material: Nylon66 UL94V-2 or UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated or Gold-Flash
- Mates With: H4201 dual row receptacle
- The Dimension Marked "▼" Must Be Recorded

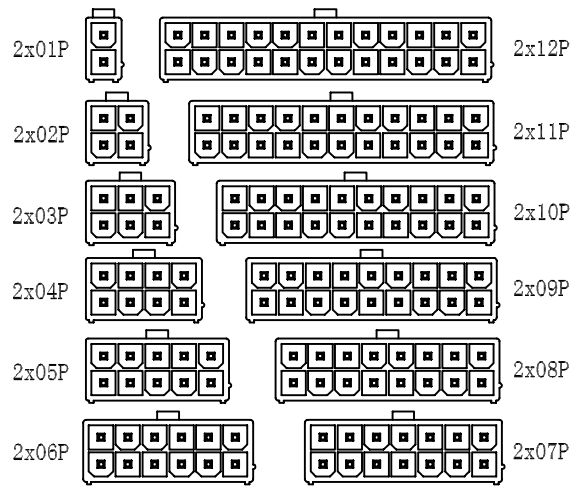

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

料号说明：  
150-MXX1E44P-X M9

PIN数：  
2Pin=02....  
24Pin=24

M9: DIM C =3.4mm  
M8: DIM C =4.5mm  
M7: DIM C =5.0mm

主体颜色：  
W=白色  
B=黑色

-TOLERANCES-  
UNLESS OTHERWISE SPECIFIED  
公差参考表

±0.25	X.X°	±3.00°
±0.20	X.XX°	±1.00°
±0.10	X.XXX°	±0.500°

东莞市龙科电子科技有限公司  
DONGGUAN LONGKE ELECTRONICS CO.,LTD.

		TITLE: ATX DIP180°	
		产品品名: 4.2pitch	
APPD: 核准: 邹重庆	PRODUCT NO:	产品料号: SEE NOTE	
CHECK: 校对: 范小飞	DATE	SCALE	UNIT
DRAW: 绘图: 何俊勇	2016.08.17	1:1	mm
		TYPE	PAGE
		CD	1/1