


PCB LAYOUT TOLERANCES:±0.05MM
PCB T=1.00mm

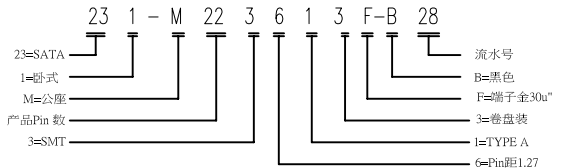

DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
3/29'14			NEW DWG		AO
5/29'19	LQX		变更端子电镀规格为30u'		A1

SPECIFICATION:
 1.MATERIAL:
 HOUSING: LCP+30% G/F, Black,UL 94V-0;
 CAP: LCP+30% G/F, Black,UL 94V-0;
 CONTACT: Brass, T=0.25mm
 Latch:Brass, T=0.30mm
 2.FINISH:
 CONTACT: GOLD 30u" PLATING ON CONTACT AREA,
 80u" MIN. TIN PLATING ON SOLDER TAILS;
 30u" MIN.NICKEL UNDERPLATING OVER ALL.
 Latch: NICKEL UNDERPLATING OVER ALL.
 3.Electrical Characteristics:
 CURRENT RATING: 1.5A Per Pin.
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Dielectric Strength: 500V/1MIN.
 4.Mechanical Characteristics:
 Insertion Force: 45N Max.
 Extraction Force: 10N Min.

-TOLERANCES-		UNLESS OTHERWISE SPECIFIED		公差参考表		东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :						
X.X	±0.25	X.X°	±3.00°	APPD: 核准:		TITLE: SATA 7+15P M R/A SMT 产品品名: Ecge Mount 2.85H						
X.XX	±0.20	X.XX°	±1.00°	CHECK:dd 校对:		PRODUCT NO:						
X.XXX	±0.10	X.XXX°	±0.500°	DRAW: 绘图: 范小飞		产品料号:	231-M223613F-B28	DATE	SCALE	UNIT	TYPE	PAGE
						2015.03.25	1:1	mm	CD	1/1		

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作